

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
11 January 2001 (11.01.2001)

PCT

(10) International Publication Number  
**WO 01/02823 A1**

- (51) International Patent Classification<sup>7</sup>: G01L 1/00 (74) Agent: HEINÄNEN OY; Annankatu 31-33 C, FIN-00100 Helsinki (FI).
- (21) International Application Number: PCT/FI00/00607
- (22) International Filing Date: 3 July 2000 (03.07.2000) (81) Designated States (*national*): CA, JP, US.
- (25) Filing Language: Finnish (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (26) Publication Language: English
- (30) Priority Data: 991506 1 July 1999 (01.07.1999) FI Published:  
— With international search report.  
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.
- (71) Applicant (*for all designated States except US*): EM-FITECH OY [FI/FI]; Konttisentie 8 B, FIN-40800 Vaajakoski (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): RÄISÄNEN, Heikki [FI/FI]; Tiklinkuja 4, FIN-02660 Espoo (FI).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD FOR THE MANUFACTURE OF A SENSOR ELEMENT, AND A SENSOR ELEMENT

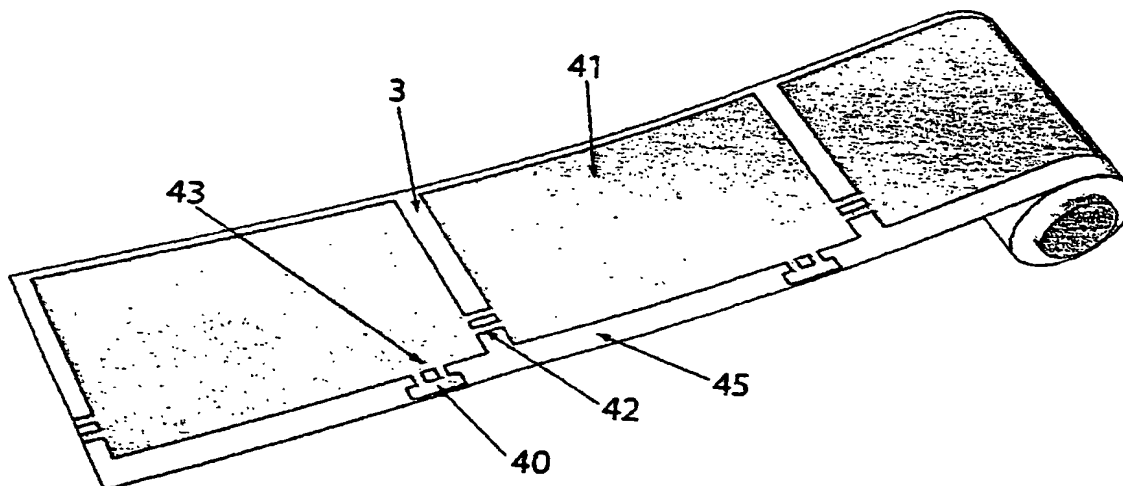

(57) Abstract: The invention relates to a method for the manufacture of a sensor element and to a sensor element. In the method, both surfaces of a sensor film are provided with metallic electrodes. The sensor element is produced by cutting it from a larger amount of sensor element material. In the manufacture of the sensor element material, the electrodes are produced as a continuous process from roll to roll and the sensor element material is formed by laminating as a continuous process from roll to roll. At least the signal electrode consists of repeated electrode patterns (41) which are at least partially connected to each other via one or more narrow connecting strips (42), and a sensor element of a desired length and/or shape is produced by cutting the material across the region of the connecting strips.

SCANNED, # 12

WO 01/02823 A1